



## **Rheology Solutions**

*Rheology Solutions is the sole Australian distributor of this product range and we welcome the opportunity of discussing your application requirements.*

*We hope the information you are seeking is contained within this file.  
If you have any questions, or require further information please contact us.  
We look forward to being of further service.*

*Regards from the Team at Rheology Solutions.*

**RHEOLOGY SOLUTIONS PTY LTD.** ACN 082 479 632

**HEAD OFFICE:** 15-19 Hillside Street, Bacchus Marsh, Victoria 3340 Australia. PO Box 754, Bacchus Marsh, Victoria 3340 Australia.  
**Telephone:** +61 3 5367 7477 **Facsimile:** +61 3 5367 6477 **Email:** [info@rheologysolutions.com](mailto:info@rheologysolutions.com) **Website:** [www.rheologysolutions.com](http://www.rheologysolutions.com)

Reliable, easy-to-use chillers  
 optimized for diverse applications.  
 Cooling capacities up to 10000 watts.

## Thermo Scientific NESLAB ThermoFlex Recirculating Chillers



### Ideal for diverse applications within the following markets:

- Analytical
- Biotech
- Industrial
- Laser
- Medical
- Metrology
- Packaging
- Pharmaceutical
- Printing
- Research
- Semiconductor
- University

### Innovative Platform

The new Thermo Scientific NESLAB ThermoFlex platform was developed with customer input from concept to design. The result is an easy-to-use, easy-to-maintain high performance chiller platform configurable to the most demanding applications.

### Superior Performance

- Improved cooling capacity
- Increased reliability
- Ease of maintenance


### Ease of Use

- An intuitive user interface for ease of operation
- Air and water filters that can be changed while unit is in operation
- Innovative, patented packaging for rapid installation
- Quick start guide for seamless start-up in minutes

### Configurable Design

- Wide range of available cooling capacities
- Variety of available options
- Installation flexibility

Features common to Thermo Scientific NESLAB ThermoFlex recirculating chillers

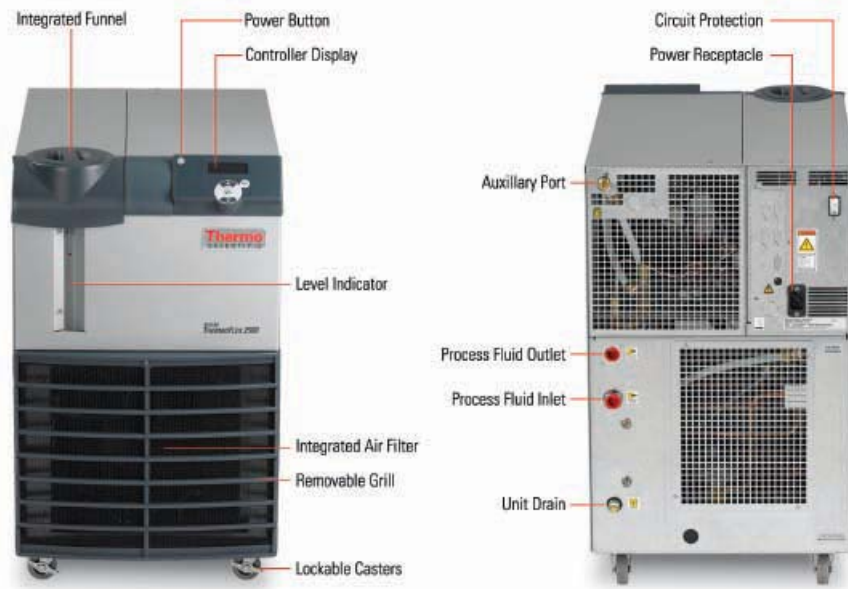


Options include:

Feature	Benefit
Pressure Relief	The pressure relief valve allows the user to set the maximum fluid pressure to meet the application requirements and is available as an internal or external option.
Pressure Relief with Flow Readout	The pressure relief valve allows the user to set the maximum fluid pressure to meet the application requirements. The Flow Readout allows for monitoring the flow rate to the application via controller readout.
Flow Control with Flow Readout	The flow control valve allows the user to adjust the flow to the application. The flow readout allows for monitoring the flow rate to the application via controller readout.
Auto Refill	Allows for automatic refilling from a customer-supplied water source to ensure the proper fluid level is maintained.
Anti Drainback	Prevents fluid from flowing back to the reservoir when the chiller is installed below the application.
DI Water	Partial flow internal DI cartridge minimizes footprint and provides fluid resistivity between 1 and 3 mOhm.
RS232 & RS485 Digital Communication	Provides digital communication for remote operation, monitoring and data logging.
Analog I/O	Provides analog communication for remote operation and monitoring. Includes a remote sensor port which allows for remote temperature control of an application when used with a remote sensor (available as an accessory).
Global Voltage	Allows the user to select the appropriate frequency and voltage to enable operation anywhere in the world.
Air-Cooled Condenser	Uses ambient-temperature room air to remove application heat.
Water-Cooled Condenser	Uses facility water to remove application heat.
SEMI S2 Compliance	Compliant with S2-0703, S8-0705, S14-0704, F47-0706.




## Cooling Capacity

Cooling Capacity for NESLAB ThermoFlex 900, 1400 & 2500

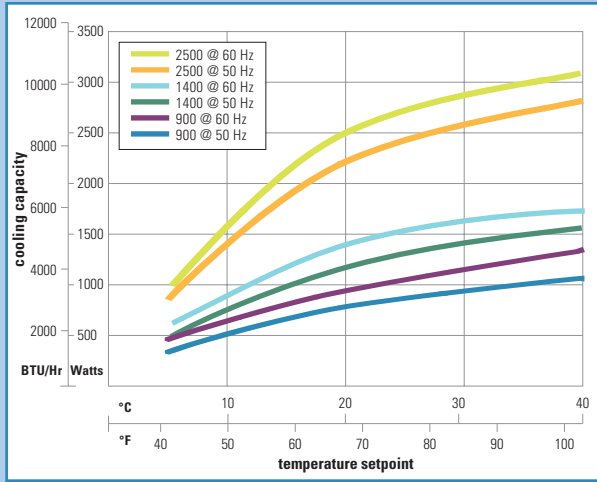


## Pumping Capacity


Pumping Capacity for Positive Displacement Pump Options (P1 & P2)

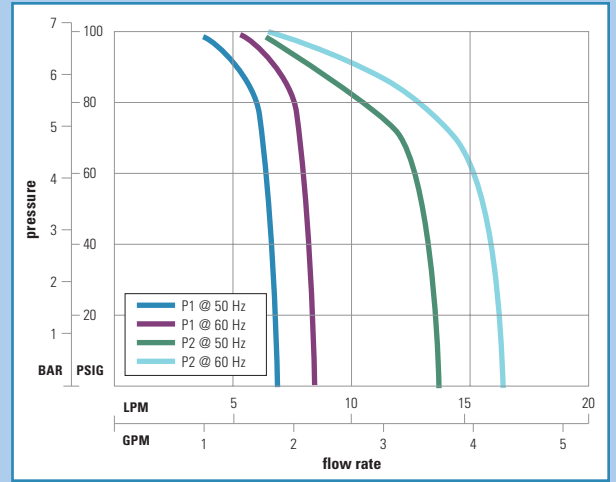


Cooling Capacity for NESLAB ThermoFlex 3500 & 5000

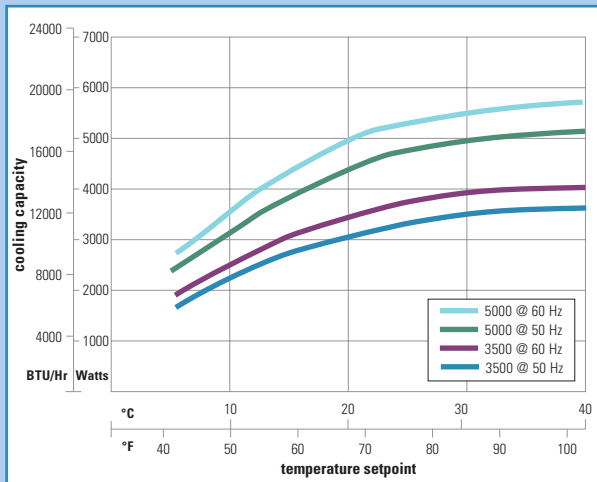


Pumping Capacity for Centrifugal Pump Options (P3 & P4)\*

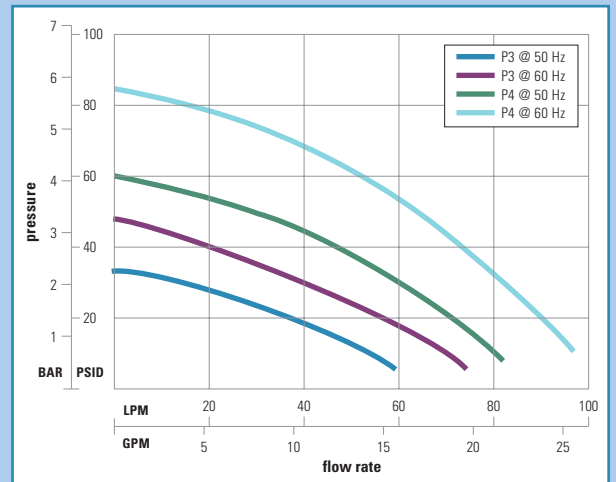

Cooling Capacity for NESLAB ThermoFlex 7500 & 10000

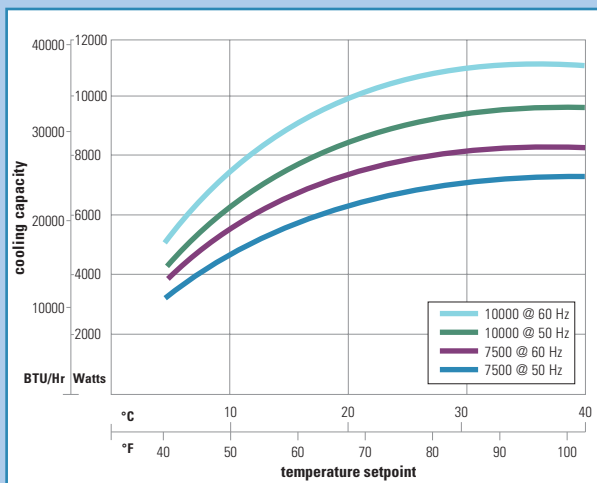

Pumping Capacity for Centrifugal Pump Option (P5)\*

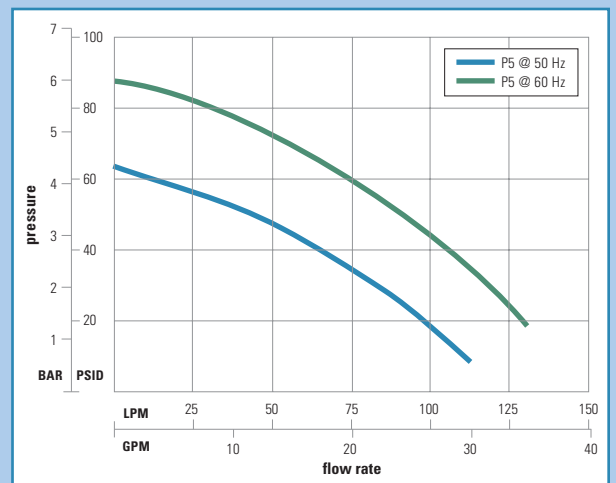

Cooling capacity based on units with P2 pumps with no backpressure. Other pumps will affect cooling capacity performance.

\*Pressure values for centrifugal pumps are differential pressures between the inlet and the outlet of the unit.

## Thermo Scientific NESLAB ThermoFlex Recirculating Chillers



Patented full flow filter ensures clean fluid to protect your application and maximize recirculation system life.



Easily removable condenser grill and air filter allow for quick and simple cleaning to optimize chiller performance and maximize component life.



Patented integrated funnel design allows for spill proof filling.



**NESLAB  
ThermoFlex 900**



**NESLAB  
ThermoFlex 1400**



**NESLAB  
ThermoFlex 2500**

	NESLAB ThermoFlex 900	NESLAB ThermoFlex 1400	NESLAB ThermoFlex 2500
<b>Setpoint Temperature Range</b>	+5°C to +40°C (+41°F to +104°F)	+5°C to +40°C (+41°F to +104°F)	+5°C to +40°C (+41°F to +104°F)
<b>Ambient Temperature Range</b>	+10°C to +40°C (+50°F to +104°F)	+10°C to +40°C (+50°F to +104°F)	+10°C to +40°C (+50°F to +104°F)
<b>Temperature Stability</b>	±0.1°C	±0.1°C	±0.1°C
<b>Setpoint Cooling Capacity</b>			
60 Hz at +20°C	900 W / 3074 BTU	1400 W / 4781 BTU	2500 W / 8538 BTU
50 Hz at +20°C	750 W / 2561 BTU	1170 W / 3996 BTU	2200 W / 7513 BTU
<b>Reservoir Volume</b>	1.9 gallons (7.2 liters)	1.9 gallons (7.2 liters)	1.9 gallons (7.2 liters)
<b>Refrigerant</b>	R134A	R134A	R134A
<b>Physical Dimensions (H x W x D)</b>			
Air-Cooled	27.3 x 14.2 x 24.6 in (69.2 x 36.0 x 62.4 cm)	27.3 x 14.2 x 24.6 in (69.2 x 36.0 x 62.4 cm)	29.0 x 17.2 x 26.5 in (73.6 x 43.6 x 67.3 cm)
Water-Cooled	—	27.3 x 14.2 x 24.6 in (69.2 x 36.0 x 62.4 cm)	29.0 x 17.2 x 26.5 in (73.6 x 43.6 x 67.3 cm)
<b>P1 — Positive Displacement Pump</b>			
60 Hz	2.1 gpm @ 60 psig (7.9 lpm @ 4.1 bar)	2.1 gpm @ 60 psig (7.9 lpm @ 4.1 bar)	2.1 gpm @ 60 psig (7.9 lpm @ 4.1 bar)
50 Hz	1.7 gpm @ 60 psig (6.4 lpm @ 4.1 bar)	1.7 gpm @ 60 psig (6.4 lpm @ 4.1 bar)	1.7 gpm @ 60 psig (6.4 lpm @ 4.1 bar)
<b>P2 — Positive Displacement Pump</b>			
60 Hz	4.0 gpm @ 60 psig (15.1 lpm @ 4.1 bar)	4.0 gpm @ 60 psig (15.1 lpm @ 4.1 bar)	4.0 gpm @ 60 psig (15.1 lpm @ 4.1 bar)
50 Hz	3.3 gpm @ 60 psig (12.5 lpm @ 4.1 bar)	3.3 gpm @ 60 psig (12.5 lpm @ 4.1 bar)	3.3 gpm @ 60 psig (12.5 lpm @ 4.1 bar)
<b>P3 — Centrifugal Pump**</b>			
60 Hz	—	—	—
50 Hz	—	—	—
<b>P4 — Centrifugal Pump**</b>			
60 Hz	—	—	—
50 Hz	—	—	—
<b>P5 — Centrifugal Pump**</b>			
60 Hz	—	—	—
50 Hz	—	—	—
<b>Unit Weight</b> (by pump type)	P1: 130.5 lb (59.2 kg) P2: 130.5 lb (59.2 kg)	P1: 130.5 lb (59.2 kg) P2: 130.5 lb (59.2 kg)	P1: 175.5 lb (79.6 kg) P2: 175.5 lb (79.6 kg)

<b>Voltage Options</b>			
115 V/60 Hz & 100 V/50 Hz	Available	Available	—
100 V/60 Hz & 100 V/50 Hz	Available	Available	—
208-230 V/60 Hz & 200 V/50 Hz	Available	Available	Available
230 V/50 Hz	Available	Available	Available
200-230 V/50-60 Hz Global Voltage	Available	Available	Available
208-230 V/60 Hz/3 phase	—	—	—
400 V/50 Hz/3 phase	—	—	—
400-460 V/50-60 Hz/3 phase Global Voltage	—	—	—



**Standard Compliance**  
(for all ThermoFlex recirculating chillers)



Specifications obtained at sea level using water as the recirculating fluid, at a +20°C process setpoint, +25°C ambient condition, at nominal operating voltage. Other fluids, process temperatures, ambient temperatures, altitude or operating voltages will affect performance. Cooling capacity based on units with P2 pumps with no backpressure. Other pumps will affect cooling capacity performance. Specifications subject to change.

\*\*Pressure values for centrifugal pumps are differential pressures between the inlet and the outlet of the unit.



	<b>NESLAB ThermoFlex 3500</b>	<b>NESLAB ThermoFlex 5000</b>	<b>NESLAB ThermoFlex 7500</b>	<b>NESLAB ThermoFlex 10000</b>
<b>Setpoint Temperature Range</b>	+5°C to +40°C (+41°F to +104°F)	+5°C to +40°C (+41°F to +104°F)	+5°C to +40°C (+41°F to +104°F)	+5°C to +40°C (+41°F to +104°F)
<b>Ambient Temperature Range</b>	+10°C to +40°C (+50°F to +104°F)	+10°C to +40°C (+50°F to +104°F)	+10°C to +40°C (+50°F to +104°F)	+10°C to +40°C (+50°F to +104°F)
<b>Temperature Stability</b>	±0.1°C	±0.1°C	±0.1°C	±0.1°C
<b>Setpoint Cooling Capacity</b>				
60 Hz at +20°C	3500 W / 11953 BTU	5000 W / 17076 BTU	7500 W / 25575 BTU	10000 W / 34100 BTU
50 Hz at +20°C	3050 W / 10416 BTU	4400 W / 15027 BTU	6425 W / 21910 BTU	8500 W / 28985 BTU
<b>Reservoir Volume</b>	1.9 gallons (7.2 liters)	1.9 gallons (7.2 liters)	4.75 gallons (17.9 liters)	4.75 gallons (17.9 liters)
<b>Refrigerant</b>	R407C	R407C	R407C	R407C
<b>Physical Dimensions (H x W x D)</b>				
Air-Cooled	38.9 x 19.3 x 30.9 in (98.7 x 48.8 x 78.4 cm)	38.9 x 19.3 x 30.9 in (98.7 x 48.8 x 78.4 cm)	52.3 x 25.2 x 33.8 in (132.7 x 63.9 x 85.6 cm)	52.3 x 25.2 x 33.8 in (132.7 x 63.9 x 85.6 cm)
Water-Cooled	38.9 x 19.3 x 30.9 in (98.7 x 48.8 x 78.4 cm)	38.9 x 19.3 x 30.9 in (98.7 x 48.8 x 78.4 cm)	45.9 x 25.2 x 33.8 in (116.6 x 63.9 x 85.6 cm)	45.9 x 25.2 x 33.8 in (116.6 x 63.9 x 85.6 cm)
<b>P1 — Positive Displacement Pump</b>				
60 Hz	2.1 gpm @ 60 psig (7.9 lpm @ 4.1 bar)	—	—	—
50 Hz	1.7 gpm @ 60 psig (6.4 lpm @ 4.1 bar)	—	—	—
<b>P2 — Positive Displacement Pump</b>				
60 Hz	4.0 gpm @ 60 psig (15.1 lpm @ 4.1 bar)	4.0 gpm @ 60 psig (15.1 lpm @ 4.1 bar)	4.0 gpm @ 60 psig (15.1 lpm @ 4.1 bar)	4.0 gpm @ 60 psig (15.1 lpm @ 4.1 bar)
50 Hz	3.3 gpm @ 60 psig (12.5 lpm @ 4.1 bar)	3.3 gpm @ 60 psig (12.5 lpm @ 4.1 bar)	3.3 gpm @ 60 psig (12.5 lpm @ 4.1 bar)	3.3 gpm @ 60 psig (12.5 lpm @ 4.1 bar)
<b>P3 — Centrifugal Pump**</b>				
60 Hz	10 gpm @ 32 psid (37.9 lpm @ 2.2 bar)	10 gpm @ 32 psid (37.9 lpm @ 2.2 bar)	10 gpm @ 32 psid (37.9 lpm @ 2.2 bar)	10 gpm @ 32 psid (37.9 lpm @ 2.2 bar)
50 Hz	10 gpm @ 20 psid (37.9 lpm @ 1.4 bar)	10 gpm @ 20 psid (37.9 lpm @ 1.4 bar)	10 gpm @ 20 psid (37.9 lpm @ 1.4 bar)	10 gpm @ 20 psid (37.9 lpm @ 1.4 bar)
<b>P4 — Centrifugal Pump**</b>				
60 Hz	15 gpm @ 57 psid (56.8 lpm @ 3.9 bar)	15 gpm @ 57 psid (56.8 lpm @ 3.9 bar)	—	—
50 Hz	15 gpm @ 34 psid (56.8 lpm @ 2.3 bar)	15 gpm @ 34 psid (56.8 lpm @ 2.3 bar)	—	—
<b>P5 — Centrifugal Pump**</b>				
60 Hz	—	—	20 gpm @ 60 psid (75.7 lpm @ 4.1 bar)	20 gpm @ 60 psid (75.7 lpm @ 4.1 bar)
50 Hz	—	—	20 gpm @ 35 psid (75.7 lpm @ 2.4 bar)	20 gpm @ 35 psid (75.7 lpm @ 2.4 bar)
<b>Unit Weight</b> (by pump type)	P1: 264 lb (120 kg) P2: 264 lb (120 kg) P3: 270 lb (123 kg) P4: 303 lb (138 kg)	P2: 264 lb (120 kg) P3: 270 lb (123 kg) P4: 303 lb (138 kg)	P2-AC: 356 lb (161.5 kg) P2-WC: 315 lb (143 kg) P3-AC: 372.5 lb (169 kg) P3-WC: 331.5 lb (150 kg) P5-AC: 405.5 lb (184 kg) P5-WC: 364.5 lb (165 kg)	P2-AC: 356 lb (161.5 kg) P2-WC: 315 lb (143 kg) P3-AC: 372.5 lb (169 kg) P3-WC: 331.5 lb (150 kg) P5-AC: 405.5 lb (184 kg) P5-WC: 364.5 lb (165 kg)
<b>Voltage Options</b>				
115 V/60 Hz & 100 V/50 Hz	—	—	—	—
100 V/60 Hz & 100 V/50 Hz	—	—	—	—
208-230 V/60 Hz & 200 V/50 Hz	Available	Available	—	—
230 V/50 Hz	Available	Available	—	—
200-230 V/50-60 Hz Global Voltage	Available	Available	—	—
208-230 V/60 Hz/3 phase	—	—	Available	Available
400 V/50 Hz/3 phase	—	—	Available	Available
400-460 V/50-60 Hz/3 phase Global Voltage	—	—	Available	Available
<b>Standard Compliance</b> (for all ThermoFlex recirculating chillers)	 			

Specifications obtained at sea level using water as the recirculating fluid, at a +20°C process setpoint, +25°C ambient condition, at nominal operating voltage.

Other fluids, process temperatures, ambient temperatures, altitude or operating voltages will affect performance. Cooling capacity based on units with

P2 pumps with no backpressure. Other pumps will affect cooling capacity performance. Specifications subject to change.

\*\*Pressure values for centrifugal pumps are differential pressures between the inlet and the outlet of the unit.

Thermo Fisher Scientific Inc. (NYSE: TMO) is the world leader in serving science, enabling our customers to make the world healthier, cleaner and safer. With annual revenues of \$10 billion, we have more than 30,000 employees and serve over 350,000 customers within pharmaceutical and biotech companies, hospitals and clinical diagnostic labs, universities, research institutions and government agencies, as well as environmental and industrial process control settings. Serving customers through two premier brands, Thermo Scientific and Fisher Scientific, we help solve analytical challenges from routine testing to complex research and discovery. Thermo Scientific offers customers a complete range of high-end analytical instruments as well as laboratory equipment, software, services, consumables and reagents to enable integrated laboratory workflow solutions. Fisher Scientific provides a complete portfolio of laboratory equipment, chemicals, supplies and services used in healthcare, scientific research, safety and education. Together, we offer the most convenient purchasing options to customers and continuously advance our technologies to accelerate the pace of scientific discovery, enhance value for customers and fuel growth for shareholders and employees alike. Visit [www.thermofisher.com](http://www.thermofisher.com).

**For more information about Thermo Scientific NESLAB recirculating chillers, visit [www.thermo.com/thermoflex](http://www.thermo.com/thermoflex), or see our comprehensive range of temperature control equipment at [www.thermo.com/tcprocess](http://www.thermo.com/tcprocess).**

© 2009 Thermo Fisher Scientific Inc. All rights reserved. All trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. Results may vary under different operating conditions. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representatives for details.

**North America:** USA/Canada tollfree: +1 (800) 258-0830; USA: +1 (603) 436-9444 or [info.tc.us@thermofisher.com](mailto:info.tc.us@thermofisher.com)

**Europe:** Benelux: +31 (0) 76 579 55 55 or [info.tc.nl@thermofisher.com](mailto:info.tc.nl@thermofisher.com); France: +33 (0) 1 60 92 48 00 or [info.tc.fr@thermofisher.com](mailto:info.tc.fr@thermofisher.com);

Germany: +49 (0) 721 4 09 44 44 or [info.tc.de@thermofisher.com](mailto:info.tc.de@thermofisher.com); United Kingdom: +44 (0) 1785 82 52 00 or [info.tc.uk@thermofisher.com](mailto:info.tc.uk@thermofisher.com)

**Asia:** China: +86 (21) 68 65 45 88 or [info.tc.china@thermofisher.com](mailto:info.tc.china@thermofisher.com); India: +91 (22) 27 78 11 01 or [info.tc.in@thermofisher.com](mailto:info.tc.in@thermofisher.com)